

Xena3918

Standalone RFC3918 application

3918

XENA MANAGER

Key Features

- Makes it easy to create, edit and execute all test-types specified in RFC 3918
- Support for IPv4 and IPv6
- Support for all IGMP/MLD versions
- Works seamlessly with multiple Xena B720/2400 and XenaCompact test chassis
- Ability to flexibly define protocol layers supported by the test incl. Ethernet, Customer and Service VLANs, IP and UDP
- Extensive configuration options for fine-tuning tests

RFC3918 describes tests for measuring and reporting the throughput, forwarding, latency and Internet Group Management Protocol (IGMP) group membership characteristics of devices that support IP multicast protocols.

Xena3918 is a free PC application developed by Teledyne LeCroy Xena to help you perform RFC3918 testing using one or more Xena test chassis. It is automatically installed together with XenaManager, (along with free apps for running RFC2544, RFC 2889 and Y.1564 tests).


Xena3918 provides an easy-to-use port configuration panel that lets you add and remove ports, and assign IP addresses and port roles.

Ports from multiple Xena B720/2400 and XenaCompact chassis can be freely mixed.

The tests can be performed using various framesizes, either as in-test variations or as multiple testruns each using a fixed frame size. The multicast traffic can be configured to use the exact protocol headers needed. All fields in the protocol headers can be modified.

The unicast traffic for mixed class and burdening tests can be specified separately in a similar fashion.

[Find out more here:](#)

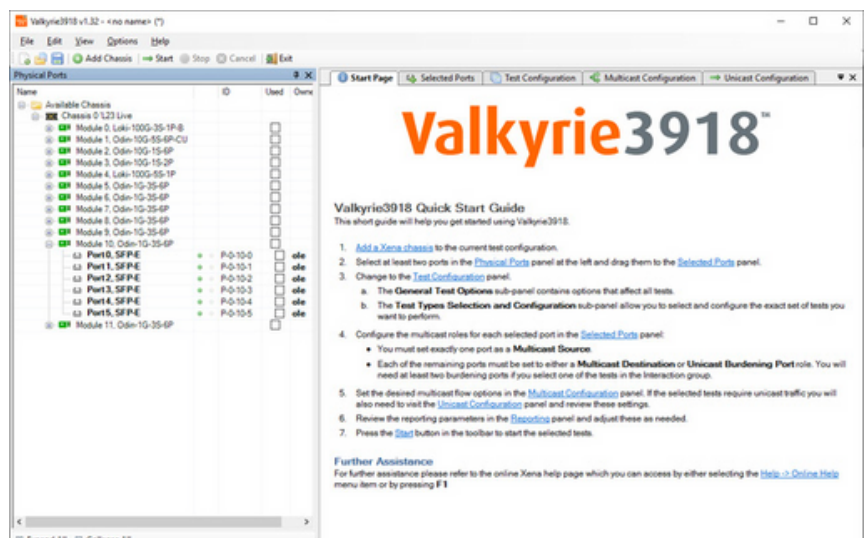

Comprehensive options enhance value

Each test type includes a set of options. These are described below*:

Duration: The duration in seconds of the time used in each trial for the actual measurement. (This does not include the test setup and teardown phases so the total duration of a test will be longer.)

Iterations: The number of times a test is repeated using the same set of variable parameters (packet size, rate, etc.)

Multicast Group Count: Lets you define a multicast group count sweep with a start, end and step value.

Multicast Group Count Selection: Lets you specify a series of multicast group counts which can be used if multiple iterations have been configured.

Initial Rate: The initial rate in percent of the overall rate configured in the Multicast Stream panel.

Maximum Rate: The maximum percent of the overall rate configured in the Multicast Stream panel.

Minimum Rate: The minimum rate in percent of the overall rate configured in the Multicast Stream panel.

Step Rate: Used to increment the rate percentage when iterating from a starting to a maximum rate.

Resolution: A minimum difference between rates which will be used to stop the iteration.

Unicast Traffic Ratio: The percentage of the overall rate configured in the Multicast Stream panel to be used for unicast traffic. (The unicast rate will be added to the configured multicast rate. So if the multicast rate has been set to e.g. 10% and the UC traffic ratio is set to 50% the total rate for the port will be 10% + (50% of 10%)

The screenshot shows a software interface with two main tabs: 'General Test Options' and 'Test Types Selection and Configuration'. The 'Test Types Selection and Configuration' tab is active, displaying a tree view on the left and configuration panels on the right.

Test Types Selection and Configuration

- Overhead
 - Group Join/Leave Delay
- Capacity
 - Multicast Group Capacity
- Forwarding and Throughput
 - Aggregated Multicast Throughput
 - Scaled Group Forwarding Matrix
 - Mixed Class Throughput
- Forwarding Latency
 - Multicast Latency
- Interaction
 - Burdened Group Join Delay
 - Burdened Multicast Latency

Common Settings

Duration: secs Iterations:

Delay Settings

Traffic-to-Join Delay: secs

Leave-to-Stop Delay: secs

Rate Settings

Initial Rate: percent

Maximum Rate: percent

Step Rate: percent

SPECIFICATIONS	
Forwarding and Throughput	Mixed Class Throughput Scaled Group Forwarding Matrix Aggregated Multicast Throughput
Forwarding Latency	Multicast Latency* Min/Max Multicast Latency*
Learning Parameters	Group Join Delay* Group Leave Delay*
Capacity	Multicast Group Capacity
Interaction	Forwarding Burdened Multicast Latency Forwarding Burdened Group Join Delay

Ordering Information

Product Description

Xena3918 Standalone RFC3918 application

Product Code

Xena3918



Local sales offices are located throughout the world. Visit our website to find the most convenient location.

1-800-5-LeCroy • teledynelecroy.com



TELEDYNE LECROY
Everywhereyoulook™